




# HSS TAPS

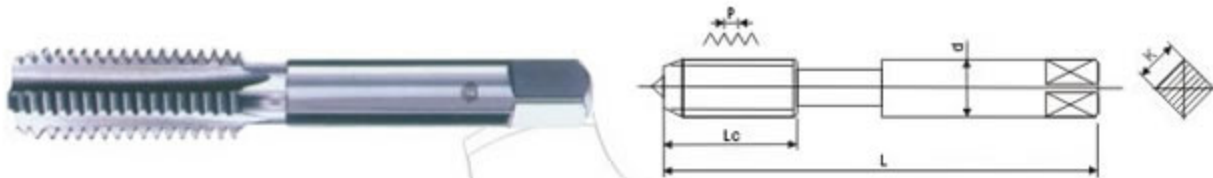

## Art.2 6 DIN352 Manual and Machine Taps

DIN352, for ISO -thread DIN13, Tolerance 6H=ISO2, one piece  
M2 HSS

M35 HSS-E, Coating, available for specified requirements

For manual and machine

Short version for through holes and blind holes

Code	M	P(mm)	L(mm)	Lc(mm)	d(mm)	K(mm)	n	Hole(mm)	Tap limits
2610030	M3	0.5	40	11	3.5	2.7	3	2.5	6H
2610040	M4	0.7	45	13	4.5	3.4	3	3.3	
2610050	M5	0.8	50	16	6	4.9	3	4.2	
2610060	M6	1.0	50	19	6	4.9	3	5.0	
2610070	M7	1.0	50	19	6	4.9	3	6	
2610080	M8	1.25	56	22	6	4.9	3	6.75	
2610090	M9	1.25	63	22	7	5.5	3	7.75	
2610100	M10	1.5	70	24	7	5.5	3	8.5	
2610110	M11	1.5	70	24	8	6.2	3	9.5	
2610120	M12	1.75	75	29	9	7	3	10.25	
2610140	M14	2.0	80	30	11	9	4	12.0	
2610160	M16	2.0	80	32	12	9	4	14.0	
2610180	M18	2.5	90	40	14	11	4	15.5	
2610200	M20	2.5	95	40	16	12	4	17.5	
2610220	M22	2.5	100	40	18	14.5	4	19.5	
2610240	M24	3.0	110	50	18	14.5	4	21.0	